

AC1000-ULTH

ASCENT CHILLERS 1000 SERIES ULTRA-LOW TEMP CHILLERS

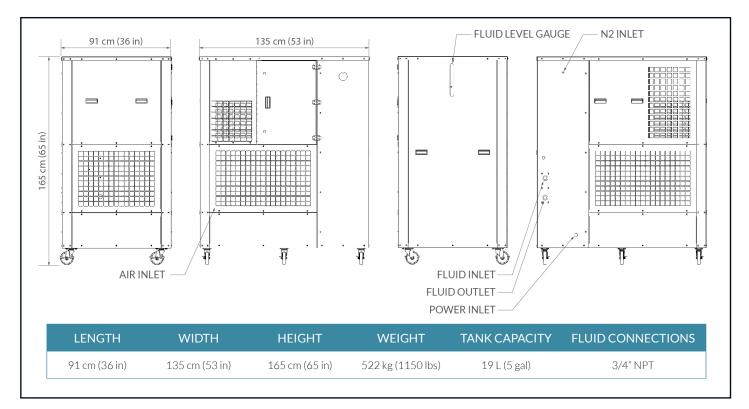

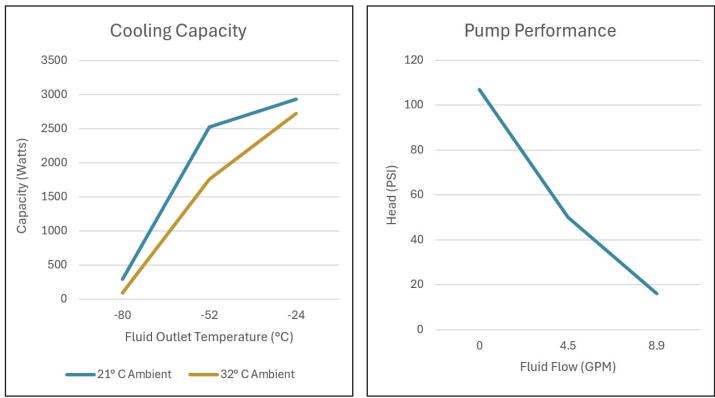

3085 West Directors Row, Salt Lake City, UT 84104 | Phone: 801-486-1004 Fax: 801-486-1007 | info@lacotech.com | www.lacotech.com

AC1000-ULTH 1000 SERIES ASCENT CHILLER SPECIFICATIONS				
	WEIGHT	522kg (1150 lbs)		
DIMENSIONS	DIMENSIONS (L x W x H)	91 x 135 x 165 cm (36 x 53 x 65 in)		
PERFORMANCE	WORKING TEMPERATURE RANGE	-70° C to 150° C (-94° F to 302° F)		
	TEMPERATURE STABILITY	±2° C		
	COOLING CAPACITY @ 21° C	-70° C (-94° F) - 1,500 W (5,118 BTU/hr) -60° C (-76° F) - 2,900 W (9,895 BTU/hr) -40° C (-40° F) - 3,200 W (10,918 BTU/hr) 0° C (32° F) - 3,200 W (10,918 BTU/hr)		
	HEATER CAPACITY	3,500 W (11,942 BTU/hr)		
	PUMP PERFORMANCE	4.5 GPM @ 50 PSI		
USER INTERFACE	CONTROLS	Electronic Programmed Temperature Controller with Constant (Set Point & Process)		
	ADDITIONAL FEATURES	Fluid Level Indicator		
REFRIGERATION CIRCUIT	COMPRESSOR	Copeland Scroll		
	HEAT EXCHANGER	Stainless Steel Brazed Plate Heat Exchangers		
	REFRIGERANT	R404a/R508b		
	ADDITIONAL FEATURES	Access Ports, Service Valves, Filter Drier, Sight Glass, Liquid Receiver, Thermostatic Expansion		
	MAX HEAT REJECTION	9,200 W (31,450 btu/hr)		
	PUMP	Continuous Duty, 0.75 kW Vortex Pump		
	INLET/OUTLET	3/4" NPT		
PROCESS FLUID	RESERVOIR	19 L (5 gal) Stainless Steel		
CIRCUIT	HEAT TRANSFER FLUID OPTIONS	NOVEC 7500, Syltherm, Paratherm LR, Paratherm CR, Fragoltherm		
	ADDITIONAL FEATURES	Inline Strainer, Inlet and Outlet Temperature Sensors, Pump Discharge Pressure Transducer, N2 Blanket for Moisture Prevention		
CONSTRUCTION	FRAME	Galvanized Steel		
	ENCLOSURE	Powder Coated Steel Enclosure with Easy Access Panels		
QUALITY	WARRANTY	1 Year Standard Warranty		
	UL/CSA CERTIFIED (FULL ASSEMBLY)	ETL 3170655, UL STD 61010-2-011, CAN/CSA STD, C22.2 No. 61010-2-011		
	MANUFACTURING	Manufactured in the U.S.A.		
POWER	AVAILABLE VOLTAGES	208-240VAC / 3P / 60Hz 208-240VAC / 1P / 60Hz 480VAC / 3P / 60Hz 50Hz and other voltages available on request		
	MAX AMPS (FLA)	25 Amps		
	RECOMMENDED BREAKER/SERVICE (MCA)	30 Amps		

OPTIONAL UPGRADES			
Process HeatingExternal temperature monitoringAlternate pumps	ControllerWater CoolingExternal Recirculation Tanks and Pumps	More Options and Customization Available - Contact LACO for more information	

3085 West Directors Row, Salt Lake City, UT 84104 | Phone: 801-486-1004 Fax: 801-486-1007 | info@lacotech.com | www.lacotech.com