



Adixen by Alcatel Vacuum Technology

## ➤ Multipurpose Leak Detectors

ASM 142 series

# Multipurpose Leak Detectors

## ASM 142 series

**The ASM 142 series sets a new performance standard for an entry-level unit.**

General purpose leak detectors have always been synonymous with limited performance units. This belief was based on limited vacuum and electronic technologies available then to meet the key requirements of size and cost. Alcatel has once again revolutionized the world of leak detection, proving its prowess in helium leak detection. The new universal leak detector model ASM 142 is the end result of an innovative engineering approach using the latest electronic technologies and vacuum concepts.

This rugged unit is undeniable proof that multipurpose no longer means compromise. On the contrary, the ASM 142 delivers unmatched features for a entry-level unit such as, a roughing capacity of 10 m<sup>3</sup>/h (7 cfm) with a usable helium sensitivity in the 10<sup>-11</sup> atm.cc/s range. In addition, its comprehensive bulletproof display panel loaded with advanced features available at your fingertips delivers a true user-friendly unit.

- The ASM 142 S, a dedicated sniffing unit, based on the same well-proven leak testing concept, is also available for outboard leak testing applications.
- The latest in the famous ASM 142 series, the ASM 142 D is the most simple solution that you can find if you are attracted to « dry » helium leak detection.



SIMPLICITY



RUGGEDNESS



VERSATILITY



### The simplest solutions for all applications.

These universal leak detectors can comply with a virtually limitless list of applications.

Its remarkable versatility based on a smart design, allows many creative possibilities:

#### Maintenance applications and quality control of vacuum systems

- High helium pumping speed at the inlet port will deliver fast response time.
- A simple operator interface including a vocal synthesizer will provide a unique tool that will ease the operator tasks.
- A convenient transport cart will allow fast mobility while in operation.

→ **Applications** - semi conductor  
- research and development  
- cryogenic  
- aerospace industry

#### Production or quality control of components



- High roughing capacity will deliver fast cycle time.
- Advanced electronics will provide full automation of the test cycle.
- Integrated software will control and manage the operation with an auxiliary pump.
- Comprehensive interface capabilities such as discrete I/O and RS 232 will ease its interface with a P.L.C or/and a P.C.

→ **Applications** - mechanical industry (seals, valves, various small pieces)

#### Outboard testing of pressurized parts (sniffing test mode)

- A unique "floating" background suppression device will deliver and guarantee a sensitivity in the  $10^7$  atm.cc/s range.
- The 142's ruggedness will allow its usage in very harsh industrial environments.

→ **Applications** - refrigeration

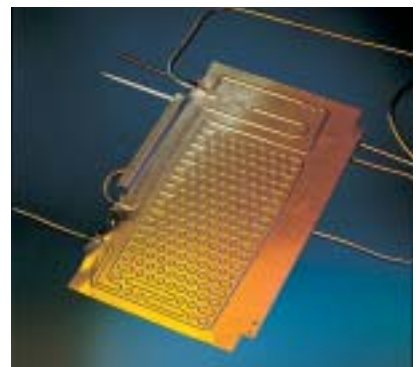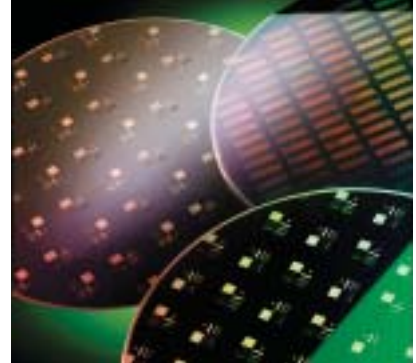

# Multipurpose Leak Detectors

## ASM 142 series

The design of the ASM 142 series brings helium leak detection...

SIMPLICITY



### SIMPLICITY

The simple design of this unit results in a quick learning curve for a new user.

It takes no more than a few minutes to get familiar with its operation.

In addition, the ASM 142 series also offers evolved features to assist the operator in his daily test operation:

- Auto-calibration with temperature compensation
- Auto-Zero function
- Helium Signal Direct Readout function
- Full automation of the test cycle.

RUGGEDNESS



### RUGGEDNESS

The ASM 142 series utilizes well proven mechanical vacuum pump technology designed specifically for heavy usage in very harsh industrial environments. The helium stability of the rotary vane pump guarantees excellent stability of the helium signal. The low rotational speed of the M.D.P. (Molecular Drag Pump) at 27,000 rpm makes this unit totally bullet proof against accidental air inrushes. Further, it allows the leak detector to be moved while in operation.

The high compression ratio of the M.D.P. facilitates the gross leak test at a high pressure (7.5 Torr / 10 mbar) which speeds up the leak test process of outgassing parts.

The ASM 142 series requires little maintenance and its internal layout allows easy access to all the components.

In addition, the rotary vane pump is equipped with a practical oil change device to speed-up the process.


VERSATILITY



### VERSATILITY

With its 10 m<sup>3</sup>/h roughing pump capacity, the ASM 142 leak detector (standard version) delivers performance to address any leak detection application. Its unparalleled versatility makes it a truly universal unit, able to perform effectively both inboard and outboard leak tests.

In addition to these superior features, this unit offers a complete set of options and accessories to meet the requirements of any applications (refer to the following pages for more information).

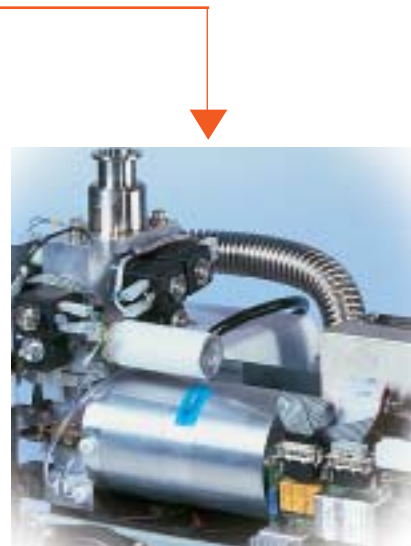

# Multipurpose Leak Detectors

## ASM 142 series

... to another level allowing any user to enjoy this unit to its full potential.

A comprehensive control panel with two distinct areas, one for entering the test parameters and the other for the operation of the unit, guides the operator each step of the way. The easy entry of the test parameters is performed via simple menus for fast set-up.

The operator interface can be customized by selecting the desired operation menu level to address each application requirement.



Expert area



Operator area



You can't miss a leak thanks to the:

- dynamic green/red bargraph
- audio alarm with variable pitch



# Multipurpose Leak Detectors

## ASM 142 series

### The Perfect Combination of Performance...

The design of the ASM 142 series includes Alcatel's newest analyzer cell, innovative operator interface, well proven helium stable rotary vane pump and high compression, low rotational speed (27,000 rpm) molecular drag pump.

#### New Analyzer cell:

- 180° magnetic deflection mass spectrometer.
- Patented amplification system based on an electron multiplier (multi channel plate concept) which provides unmatched stability and sensitivity.
- Two independent filaments for a better reliability and maintainability (automatic switch from one filament to the other with automatic auto-calibration for maximum up time).

#### Front Panel Display:

- 4 levels of operation menus for enhanced user friendliness.
- Comprehensive display panel with sensing switches for smoother operation.
- Voice synthesizer for additional operator interface ability.



#### Rotary vane pump or Dry Roughing System:

Well proven technologies:

##### 2-stage helium stable rotary vane pump:

- 10 m<sup>3</sup>/h (6 cfm) roughing capacity in the standard version for fast test cycle (ASM 142)
- 5 m<sup>3</sup>/h (3.2 cfm) for the sniffing version (ASM 142 S)



#### Electronic Interface:

Comprehensive interface to connect easily to a P.L.C and/or to a P.C.

- Discrete I/O interface
- Complete RS 232 interface.



#### Dry Roughing System:

The design of the ASM 142 D uses all our cumulated experience in the compact dry pumping systems:

- Diaphragm pump + molecular drag pump which develops an air pumping speed from 1 up to 18 m<sup>3</sup>/h (0,6 up to 10,5 cfm).

### ASM 142 series

The modules of the ASM 142 series are based on the same well proven leak testing concept. They share the same basic components:

- high sensitivity analyzer cell with dual filaments,
- improved molecular drag pump model AMP007
- latest generation of electronics,
- plastic cover and metal frame.

### ASM 142, Standard version

The ASM 142 is a truly multipurpose unit that complies with a virtually limitless list of applications. It offers inboard and outboard leak testing capabilities, with unmatched features such as a 10 m<sup>3</sup>/h (7 cfm) roughing capacity for fast cycle time.

The ASM 142 is the perfect answer to all the users who need to perform various types of leak tests, including a vacuum test.



### ASM 142 S, Dedicated sniffing unit

The ASM 142 S delivers a perfect combination of performance with unique features.

- Equipped with a helium-stable 2005 rotary vane pump with an optimized internal vacuum block.
- Integrates a comprehensive operator interface, ideally designed for sniffing leak testing.
- 5 m sniffer probe.

- Auto-calibration performed in sniffing mode with temperature and age compensation for high accuracy calibration.

The ASM 142 S is the perfect answer to all industrial outboard leak testing applications requirements.

### ASM 142 D, The most simple solution in terms of dry helium leak detector

The latest in the famous ASM 142 series, the ASM 142 D is the most simple solution that you can find if you are attracted to the « dry » helium leak detection.

This 100 % hydrocarbon-free leak detector not only guarantees total cleanliness during the leak test, but also provides advantages like simplicity of maintenance.

The roughing pump package of the ASM 142 D operates up to 10,000 hours maintenance free and develops an air pumping speed from 1 to 18 m<sup>3</sup>/h (0,6 to 10,5 cfm) thanks to the association of a diaphragm pump and a molecular drag pump.



# Multipurpose Leak Detectors

## ASM 142 series

### Various types of options

#### Interface board

It accommodates automation of the leak detector through a P.C or a P.L.C. The interface board includes several types of interface:

- Analog signal (Helium signal)
- Discrete input/output (for remote control through a P.L.C)
- A complete RS 232 (for remote control through a supervision system).

#### Automatic test chambers

- Small model: hemispherical test chamber Ø 72 mm, depth 31 mm, with start of cycle contact.
- Medium model: cylindrical test chamber Ø 85 mm, depth 68 mm, with start of cycle contact.

This option integrates the interface board.

#### Metal seal

Allows using the leak detector in very high helium environment.

#### 3 masses option

(ASM 142, ASM 142 D only)

Hydrogen, helium 3, helium 4

### and accessories

#### Remote control

The ASM 142 series uses the same remote control than all the new generation Alcatel leak detectors. It offers all the advanced features such as auto-calibration, auto-zero and zoom function.



#### Transport cart

This cart allows easy transportation of the leak detector. It also includes a compartment for accessories, maintenance kit and the instruction manual.



#### Measurements units

The multi-color remote control offers the choice from 3 different measurement units :

- mbar.l/s and mbar.
- Pa.m<sup>3</sup>/s and Pa.
- Torr.l/s and Torr.

Description	PART NUMBER
Remote control	: mbar.l/s : Pa.m <sup>3</sup> /s : Torr.l/s
Transport cart	106688 108880 108881
Kit RS 232	108068
Helium spray probe	107657
Standard sniffer probe	109951
Dedicated sniffer probes	SNC1E1T1
	*

\*For accessories, see "Accessories for helium leak detectors".



# Multipurpose Leak Detectors

## ASM 142 series

### Technical Specifications


Specifications → vacuum mode		ASM 142	ASM 142 D	ASM 142 S
Minimum detectable helium leak	1.10 <sup>-11</sup> atm.cc/s	X	X	
Maximum inlet test pressure	10 mbar (7.5 Torr)	X	X	
Helium pumping speed at the inlet of the unit	1.3 l/s (78 l/min)	X	X	
Roughing capacity	10 m <sup>3</sup> /h (6 cfm)	X		
	1 up to 18 m <sup>3</sup> /h (0,6 up to 10,5 cfm)		X	

Specifications → sniffing mode		ASM 142	ASM 142 D	ASM 142 S
Minimum detectable helium leak	1.10 <sup>-7</sup> atm.cc/s	X	X	X
Response time	< 1 s	X	X	X

General specifications		ASM 142	ASM 142 D	ASM 142 S
Start-up time (including auto-calibration)	Less than 3 minutes	X	X	X
Power consumption		< 1 kw	< 500 w	< 500 w

Integrated Functions		ASM 142	ASM 142 D	ASM 142 S
Auto-calibration, with built-in temperature compensated calibrated leak		X	X	X
Full automation of test cycle including:		X	X	
- cycle sequence				
- memorization of the last test				
- test result display				
Helium background suppression with "floating zero" to keep the signal from going negative.		X	X	X
Automatic external calibration		X	X	
Helium pollution prevention		X	X	
Audio alarm with variable pitch (up to 90 dbA)		X	X	X
Vocal synthesizer		X	X	X

User defined parameters		ASM 142	ASM 142 D	ASM 142 S
4 user languages		X	X	X
3 pressure and Helium flow units		X	X	X
Weight		56 kg 123 lb	42 kg 92 lb	56 kg 123 lb

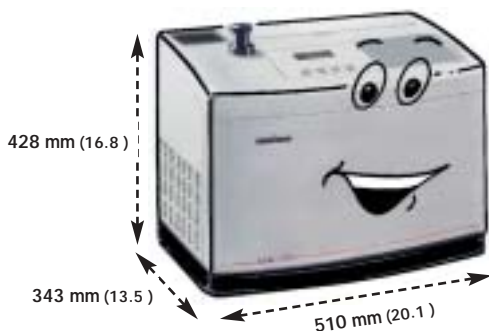

# Multipurpose Leak Detectors

## ASM 142 series

### Ordering information

### ASM 142 - ASM 142 D

0 0 0 0

Leak detector		
	ASM 142	ASM 142 D
Code	T	W

Masses		
	Helium	3 Masses
Code	0	3

3 Masses (3). This option allows the leak detector to detect masses 2, 3 and 4.

Seals for the vacuum module and analyzed cell		
	Elastomer	Metal *
Code	R	L

The leak detector can be provided with :  
Elastomer seals (for the high vacuum as well as the inlet bloc) as standard (R) or with metal seals for specific applications (L).  
\* metal seal not available for the ASM 142 D.  
The elastomer seal is the standard configuration.

Interface board + test chamber				
	Without	Interface board only	Auto. test chamber small model	Auto. test chamber medium model
Code	0	1	2	3

The automatic test chambers integrate the interface board.

Language				
	French	English	German	Japanese
Code	A	B	C	E

Main power supply		
	100/130 V - 50/60 Hz	220/240 V - 50/60 Hz
Code	7	8

Main power cable type						
	U.S.A.	France/Germany	U.K.	Italy	Switzerland	Without plug
Code	1	2	3	4	5	7

### For example

You need

ASM 142            **T**  
 3 masses            **3**  
 Elastomers seal    **R**  
 With interface board    **1**  
 French                **A**  
 220/240 V  
 50/60 Hz            **8**  
 France                **2**

= **T 3 R 0 0 0 0 1 A 8 2 0**

# Multipurpose Leak Detectors

## ASM 142 series

### Ordering information ASM 142 S

U 0 R 0 0 0 C [ ] [ ] [ ] [ ] 0

Leak detector	
ASM 142 S	
e	U

Interface board	
With	Without
e	1
	0

Language			
French	English	German	Spanish
e	A	B	C
			F

Main power supply	
100/130 V - 50/60 Hz	220/240 V - 50/60 Hz
e	7
	8

Main power cable type					
U.S.A.	France/Germany	U.K.	Italy	Switzerland	Without plug
e	1	2	3	4	5
					7

Standard sniffer probe (wire 5 m long / nozzle 9 cm - SNC1E1T1) is provided with the ASM 142 S sniffer unit.

### For example

You need

ASM 142 S    U  
 Without interface board    O  
 English    B  
 220/240 V 50/60 Hz    8  
 U.K.    3

=

U 0 R 0 0 0 C O B 8 3 0